

HIGH POTENTIAL MAGNESIUM ANODES

Specification Data

For pricing and delivery information please contact the office nearest you.

Atlantic Time Zone:

Halifax Tel: (902) 468-7878
Fax: (902) 468-2187

Eastern Time Zone:

Montreal Tel: (450) 449-2600
Fax: (450) 449-6353

TORONTO Tel: (416) 630-2600
Fax: (416) 630-2393

Sarnia Tel: (519) 336-0740
Fax: (519) 336-5934

Mountain Time Zone:

Calgary Tel: (403) 233-2601
Fax: (403) 233-2658


Pacific Time Zone:

Vancouver Tel: (604) 521-0572
Fax: (604) 521-0910

Overseas:

Dubai, Tel: (971-4) 347-7660
U.A.E. Fax: (971-4) 347-0969

Magnesium Anode Packaging

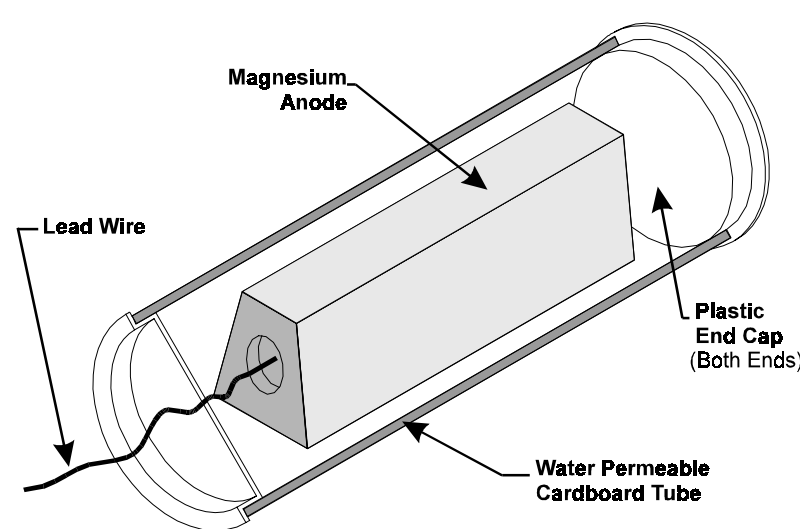

Product Code	Net Weight (Bare Anode)	Gross Weight (Packaged)	Standard Packaging
5D3GG	5 Lbs.	Approx. 16 Lbs.	5" Dia. x 14"
9D3GG	9 Lbs.	" 20 Lbs.	5" Dia. x 18"
17D3GG	17 Lbs.	" 35 Lbs.	5" Dia. x 30"
17D2GG	17 Lbs.	" 60 Lbs.	5" Dia. x 53"
20D2GG	20 Lbs.	" 75 Lbs.	5" Dia. x 63"
32D5GG	32 Lbs.	" 80 Lbs.	8" Dia. x 27.5"

Alloy: ASTM Specification B 843-93

Backfill:

- Ground Hydrated Gypsum 77% ± 2%
- Powdered Wyoming Bentonite 15% ± 1%
- Anhydrous Sodium Sulphate 8% ± 1%

Packaging: Per chart above - in a water permeable cardboard tube.

Wire: 3 metre (10 foot) TWH #12/7 STR blue lead wire, silver soldered to electro-galvanized steel core extending 75% of anode length.