



4047W Pair Test Plug Assembly

Instruction

Application

The 3M brand 4047W Pair Test Plug Assembly makes electrical connection from test equipment to a cable pair in MS² Termination Module. The assembly tags, tests or establishes a data or talk circuit and is easily wall mountable.

Kit Contents

- 1 - 4047W Pair Test Plug (with cord)
- 1 - Tool Dish (with molded-in talk block)
- 2 - 19 mm (3/4") long wood screw

Installation

Install pair test plug assembly in a convenient location using the two screws supplied. See Figure 1.

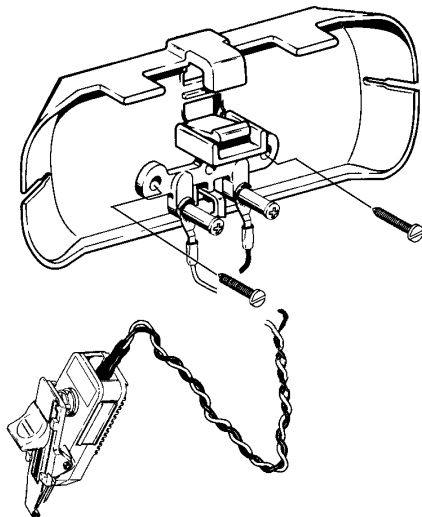


Figure 1 - 4047W Pair Test Plug Assembly

Usage

1. Insert pins of plug into test entry port in mid-level of module; the longer pin goes into the right (RING) member. See Figure 2.

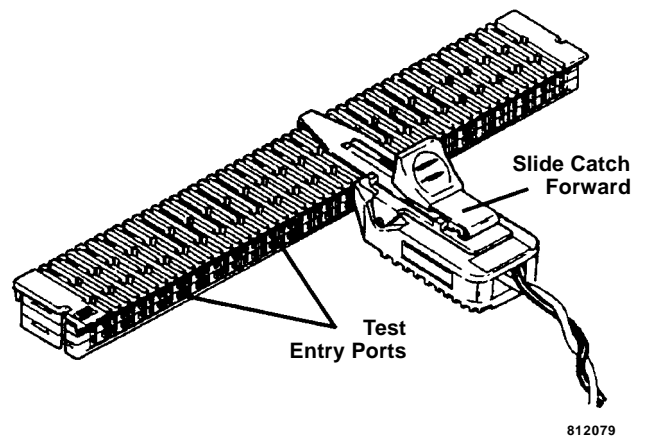


Figure 2 - Pair Test Plug inserted into module.

2. Slide catch forward over module cover to hold plug in place.
3. Attach clips from test set to terminal block.

Important Notice - Before utilizing the product the user should determine the suitability of the product for its intended use. The user assumes all risks and liability in connection with such use. 3M'S WRITTEN WARRANTY FOR THE PRODUCT IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. The user's exclusive remedy for breach of 3M's written warranty shall be the repair or replacement of such quantity of product which is proven to be defective. In no case shall 3M be liable for any special, incidental, or consequential damages based upon breach of warranty, breach of contract, negligence, strict liability or any other legal theory.



Telecom Systems Division

6801 River Place Blvd.
Austin, TX 78726-9000
800/426-8688

Printed on 50% recycled paper
with 10% post-consumer

Printed in USA
© 3M 1994 34-7017-0847-0