



4055W Impact Tool Assembly Instructions

Application


The 3M Brand 4055W Impact Tool Assembly is designed to connect jumper wire to MS² Termination Modules. It is the only approved tool for this procedure.

Kit Contents

- 1-4055 Impact Insertion Tool (with cord)
- 1-Tool Dish
- 2-19mm (3/4") long wood screws


Installation

Install the impact tool assembly in a convenient location using the two screws supplied.

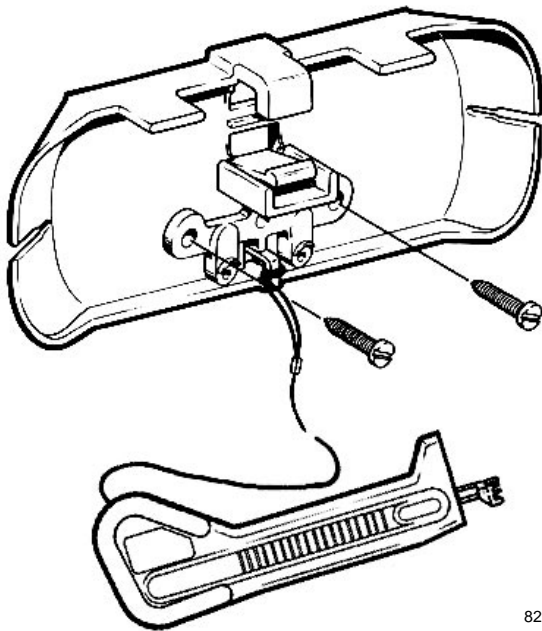


Usage

1. Pull jumper wire from spool if applicable.
2. Split jumper wire pair over colored Module cover rib (TIP left, RING right for telephone applications) and SNAP wire into BOTH front and rear catches.

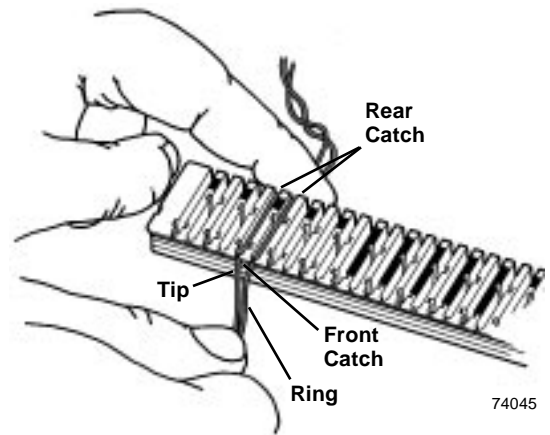

3. Punch wires down with the impact insertion tool. Tool will impact ONLY when held PERPENDICULAR to face of termination module. Remove excess cut wire by pulling through front catch. (Tool may not impact if used on seated wire or on contact that has no wire.)

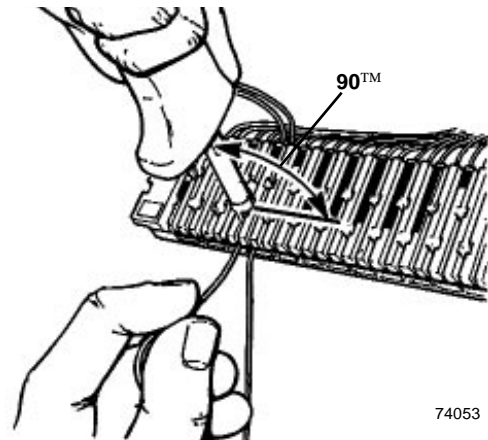

Important Notice - Before utilizing the product the user should determine the suitability of the product for its intended use. The user assumes all risks and liability in connection with such use. 3M'S WRITTEN WARRANTY FOR THE PRODUCT IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. The user's exclusive remedy for breach of 3M's written warranty shall be the repair or replacement of such quantity of product which is proven to be defective. In no case shall 3M be liable for any special, incidental, or consequential damages based upon breach of warranty, breach of contract, negligence, strict liability or any other legal theory.

Telecom Systems

6801 River Place Blvd.
Austin, TX 78726-9000
800/426-8688

Issue 1
34-7017-0849-6
Printed in USA
© 3M 1993